



Name	Premium 10 0 Hg
Cell Chemistry	Zinc Air
Designation	IEC : PR70 ANSI : 7005ZD Common : 10
Nominal Voltage	1.45 volts
Weight	0.31 grams (0.011 oz)
Volume	0.08 cc (0.005 cu. in.)
Operating Temperature Range	-10° C to 50° C (14° F to 122° F)
Impedance	< 9.0 ohm @ AC 1000 Hz
IEC/ANSI Standard	96 hours – 1 mA background, 5 mA 100 ms pulse, once every 2 h, 12 h/d to 1.05V at 21° C(70° F) and 50% R.H.
IEC/ANSI High Drain	59 hours – 1.5 mA background, 5 mA 100 ms pulse, once every 2 h, 12 h/d to 1.1V at 21° C(70° F) and 50% R.H.
How to Use	Hearing Aid Instruments Remove and discard the plastic tab covering air holes. Allow the battery to stand for fifteen seconds to ensure proper activation.
Storage Conditions	Batteries should be stored in ambient conditions between +10° C and +30°. Avoid direct sunlight
Shelf Life	Four years with tab applied when stored at 21° C(70° F).
Environmental	<u>These cells have no added mercury.</u> <u>Refer to Rayovac Material Safety Data Sheets for more detailed information.</u>
Compliant to the Following Standards	IEC 60086-1, IEC 60086-2 ANSI C18.1M Parts 1 & 2

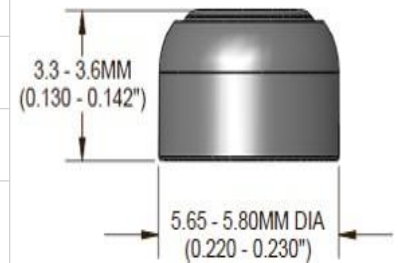

DIMENSIONS SHOWN ARE IEC STANDARDS FOR ENGINEERING TOLERANCES CONTACT RAYOVAC.

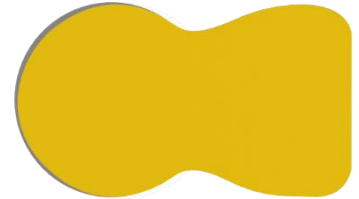